



# Active Pro / Active

## Technical Data

Made for  
iPhone | iPad | iPod



- 42 dB / 118 dB SPL  
(2 ccm coupler)
- 53 dB / 128 dB SPL  
(ear simulator)


Data sheet also applicable for Active Pro DEMO

# Active Pro / Active | Technical Data

	2 ccm coupler	Ear simulator
<b>Output sound pressure level</b>		
OSPL 90 at 1.6 kHz	–	119 dB SPL
OSPL 90 (Peak)	118 dB SPL	128 dB SPL
HFA-OSPL 90	110 dB SPL	–
<b>Gain</b>		
FOG at 1.6 kHz	–	48 dB
FOG (peak)	42 dB	53 dB
HFA-FOG	39 dB	–
Reference test gain	33 dB	41 dB
<b>Frequency, noise and directivity</b>		
Frequency range Active Pro	100 - 9500 Hz	120 - 10000 Hz
Active	100 - 8200 Hz	120 - 8200 Hz
Equivalent input noise	17 dB SPL	18 dB SPL
Total harmonic distortion at 500 / 800 / 1600 / 3200 Hz	1 / 1 / 1 / 1 %	2 / 2 / 2 / – %
Tinnitus Function broadband	65 dB SPL	–
AI-DI		5.3 dB
<b>Inductive coil sensitivity</b>		
MASL (1 mA/m) at 1.6 kHz	–	–
HFA MASL (1 mA/m)	–	–
HFA SPLITS (left/right)	–	–
RSETS (left/right)	–	–
HFA SPLIV	–	–
<b>Battery</b>		
Battery runtime (without streaming)		up to 26 h
Battery runtime (incl. 2 h streaming)		up to 23 h
<b>IRIL IEC 60118-13:2016 Ed. 4.0</b>		
700-960 MHz (rating)		user
1400-2000 MHz (rating)		user
2000-2700 MHz (rating)		user
<b>ANSI C63.19-2011</b>		
800-950 MHz (rating)		M4
1600-2500 MHz (rating)		M4


Please find additional information to the values on page "Further information".

# Active Pro / Active | Fitting Range

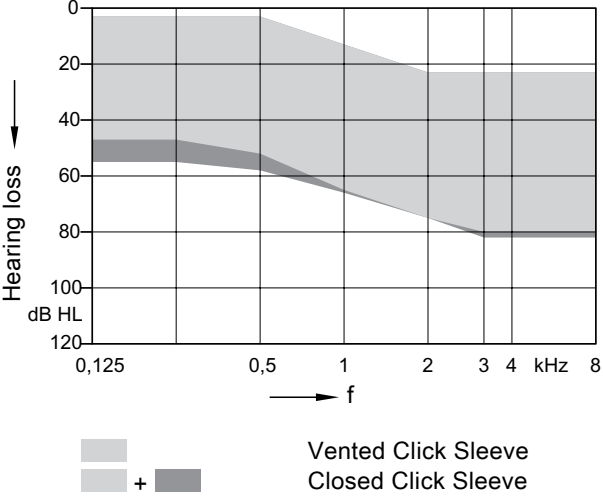

# Active Pro / Active | Basic Data


## 2 ccm coupler

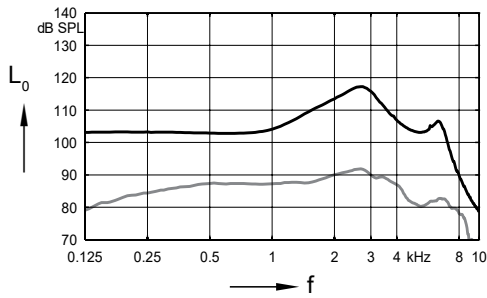

Max. Output sound pressure level  
( $L_1 = 90$  dB)


Full on gain  
( $L_1 = 50$  dB)

## Ear simulator

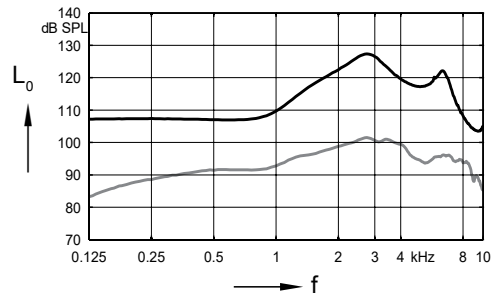


Max. Output sound pressure level  
( $L_1 = 90$  dB)

Full on gain  
( $L_1 = 50$  dB)

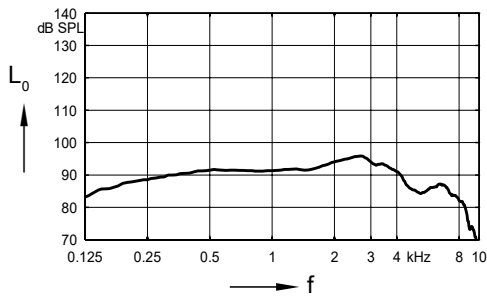

Frequency response  
( $L_1 = 60$  dB)

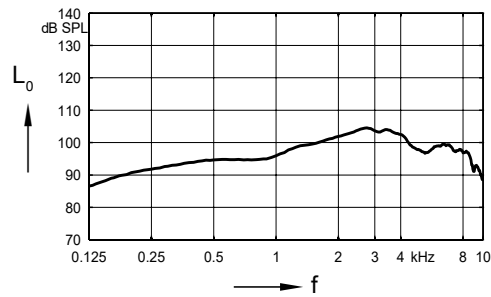

Basic acoustic response  
( $L_1 = 60$  dB)

# Active Pro / Active | Features and Accessories

	Active Pro	Active
<b>Dynamic Soundscape Processing</b>	■■■■■	■■■■■
<b>Sound Clarity</b>	■■■■■	■■
Signal processing (channels) / Gain&MPO (handles)	48 / 20	16 / 8
Hearing programs	6	4
Extended dynamic range	✓	✓
Extended bandwidth	✓	—
EchoShield	✓	—
HD Music (presets)	3	—
eWindScreen	Monaural	—
Speech and noise management	✓	✓
SoundSmoothing	✓	—
Feedback cancellation	✓	✓
<b>Speech Quality</b>	■■■■■	■■
Directionality (Automatic / Adaptive)	Binaural	✓
Spatial SpeechFocus <sup>1)</sup>	✓	—
TwinPhone <sup>1)</sup>	✓	—
Frequency compression	✓	✓
<b>Wearer Interaction</b>	■■■■■	■■■■■
Signia App (iOS and Android)	✓	✓
Spatial Configurator	✓	—
Adaptive Streaming Volume <sup>2)</sup>	✓	✓
<b>Direct Streaming</b>	✓	✓
Made for iPhone	✓	✓
<b>Tinnitus</b>	✓	—
Notched Amplification Therapy	✓	—
Tinnitus noise therapy signal	✓	—
<b>Fitting</b>	✓	✓
Smart Optimizer and Data Logging	✓	✓
Acclimatization manager	✓	✓
InSituGram	✓	✓
AutoFit	✓	✓
<b>TeleCare</b>	✓	✓
Remote Services	✓	✓
Signia App	✓	✓

<sup>1)</sup> req. bilateral fitting

<sup>2)</sup> streaming only

■■■■■ highest feature performance  
 ✓ available — not available ○ optional

## Active Pro / Active | Features and Accessories

<b>Style specific features</b>	
Ingress Protection Rating	IP68
Charging contacts	✓
Battery Size	—
Battery door on/off function	—
Nanocoated housing	—
e2e wireless 3.0	✓
User controls coupling via e2e	✓
Wireless programming	✓
<b>Instrument configurations</b>	
Flat cover	—
Rotary volume control	—
Push button	—
Rocker switch	—
Color conversion kit	—
Color conversion kit with T-Coil	—
Battery door – child lock	—
T-Coil	—
Small earhook	—
<b>Programming accessories</b>	
ConnexxAir / ConnexxLink	— / —
Noahlink Wireless	✓
Programming adapter / cable	—
<b>Accessories</b>	
Active Charger	Mandatory
miniPocket	○
StreamLine TV	○
StreamLine Mic	○
CROS Pure 312 X	—
CROS Pure Charge&Go X	—
CROS Silk X	—

✓ available    — not available    ○ optional

# Active Pro / Active | Further information

## Abbreviations

The following abbreviations are used in this datasheet:

OSPL	Output Sound Pressure Level
HFA	High Frequency Average
FOG	Full-On Gain
MASL	Magneto Acoustical Sensitivity Level
SPLITS	Coupler SPL for an Inductive Telephone Simulator
RSETS	Relative Equivalent Telephone Sensitivity
SPLIV	SPL In a Vertical magnetic field
AI-DI	Articulation Index - Directivity Index
IRIL	Input Related Interference Level
RTF	Reference Test Frequency

## Standards and additional information

- ▶ All measurements with the 2 ccm coupler were performed according to ANSI S3.22-2014 and IEC 60118-0:2015 if applicable.
- ▶ All measurements with an ear simulator were performed according to IEC 118-0/A1:1994 and to DIN 45605 (frequency range) if applicable.
- ▶ Curves and figures representing FOG are measured with 20 dB reduction and 70 dB SPL input level.
- ▶ Figures representing Equivalent Input Noise incorporate a moderate expansion.
- ▶ Tinnitus noiser measurement conditions: all tinnitus single frequency sliders in max position, master volume slider in default position (0 dB) and local volume control in default position.
- ▶ Inductive coil sensitivity values, inductive response curves and T ratings apply for instruments with telecoil only.
- ▶ The current consumption is measured in reference test setting (RTS) according to the applicable standards. Due to the settling behaviour of hearing instruments supporting RF (radio frequency), the battery current is measured 3 minutes after turning on (note: no pairing)
- ▶ The battery runtime is based on first fit settings using 60 % of the fitting range and an ISTS (International Speech Test Signal) input signal at 65 dB SPL (note: pairing established). The actual battery runtime is determined by battery quality, hearing loss, sound environment, usage and activated feature set. Regarding RF usage (Bluetooth streaming) two different conditions are considered.
- ▶ Extended frequency range up to 12 kHz for Active Pro devices only.
- ▶ The following acoustic connections / ear pieces were used:
  - Closed Click Sleeve
- ▶ Active Pro and Active are part of the Kit Active Pro/Kit Active Pro DEMO or Kit Active. Each Kit also consists of Active Charger. Please consult the datasheet for Active Charger for relevant technical information.


## Special note for instruments with built-in lithium-ion rechargeable battery

- ▶ The runtime of all lithium-ion rechargeable batteries reduces over time. The estimates are based on fresh lithium-ion rechargeable battery capacity. Under normal operating conditions, the battery will retain up to 80 % of its initial capacity after 2 years of use. Please note that battery performance will vary depending on individual usage patterns and environmental conditions.

Made for  
 iPhone | iPad | iPod

“Made for iPod”, “Made for iPhone”, and “Made for iPad” mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

The information in this document contains general descriptions of the technical options available, which do not always have to be present in individual cases and are subject to change without prior notice. The required features should therefore be specified in each individual case at the time of conclusion of the respective contract.

 **Legal Manufacturer**  
WSAUD A/S  
Nymøllevej 6  
3540 Lyngø  
Denmark

  
0123

Order No. 04418-99T01-7600  
© 12.2020, WSAUD A/S  
All rights reserved

Subject to change  
without prior notice

[www.signia.net](http://www.signia.net)



**WARNING**

Choking hazard posed by small parts.

- ▶ This instrument is not intended for the fitting of infants, children under 3 years or persons of mental incapacity.



**WARNING**

Instrument has an output sound pressure level of 132 dB SPL or more. Risk of impairing the residual hearing of the user.

- ▶ Take special care when fitting this instrument.